


GT06E

3G Rastreador Multifuncional GNSS

el Rastreador GT06E es un GPS 3G inteligente y multifuncional perfecto para logistica, rastreo de equipo pesado, manego auto financiado o cualquier otro tipo de flota, cuenta con distintas alarmas y/o alertas tambien tiene un boton de SOS, monitoreo de voz, sensores de gasolina.

Añadiendo otros perifericos puedes personalizar el GT06E a las necesidades de tu flota.

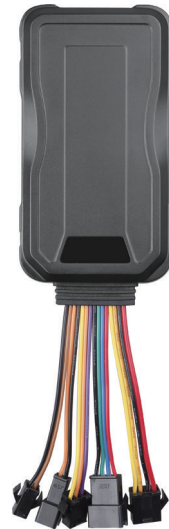

Interferencias RS232 & TTL

Capaz de conectarse con diferentes accesorios para la expacion de capacidades



Corte Remoto(Gasolina/Energia)

Inmoviliza un vehiculo por el corte del suministro ya sea gasolina o energia.



Boton de Panico

Un boton ubicado cerca del conducto que le permite pedir ayuda inmediata con un solo toque



Red WCDMA & GSM & HSPDA

Capas de recibir y transmitir informacion en coverturas de 3G y 2G



Microfono Externo para monitoreo

Microfono extendido mediante un cable para el facil monitoreo



Deteccion de ecendido

Siempre te mantiene informado en el estado de ACC de tu vehiculo.



Sensor de gasolina

Ultrasonico/Capacitivo (Opcional)


Se notificado rapidamente cuando el nivel de gasolina cambie drasticamente o en un periodo de tiempo corto



Alertas Multiples

Alertas instantaneas para eventos tipicos que incluyen vibraciones hasta bateria baja

Vehicle Tracking

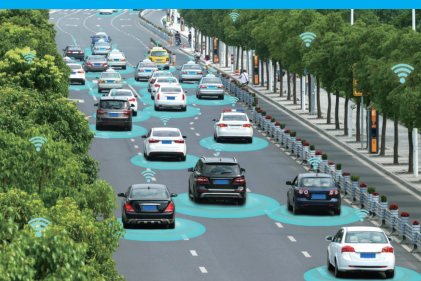

Driver Management



Logistics



GNSS

Positioning system	GPS+LBS
Frequency	L1
Positioning accuracy	<2.5m CEP
Track sensitivity	-165dBm
Acquisition sensitivity	-148dBm
TTFF (open sky)	Avg. hot start ≤1sec Avg. cold start ≤38sec

Cellular

Communication network	WCDMA/GSM
Frequency	WCDMA: 850/900/1900/2100 MHz GSM: 850/900/1800/1900 MHz

Power

Battery	450mAh/3.7V industrial-grade Li-Polymer battery
Input voltage	9-33VDC

Interface

LED indication	GNSS (Blue), Cellular (Green), Power (Red)
SIM	Standard-SIM
Data storage	32+32Mb
Digital inputs	ACC, SOS, input
Digital outputs	Relay, output

Physical specification

Dimensions	98,0 x 52,0 x 15,0mm
Weight	80g

Operating environment

Operating temperature	-20 C to +70 C
IP rating	5% ~ 95%, non-condensing

Feature

Voice monitoring range	≤5 meters
Sensors	Accelerometer
Scenarios	Vehicle movement alert, Over-speed alert, Geo-fence, Voice Monitoring, Vehicle battery detection, Power supply disconnection
Driving behavior analysis	Harsh acceleration, Harsh braking, Harsh cornering, Collision

Cra. 69P # 78 - 68 - BOGOTÁ - Colombia

Teléfono: (571) 753 46 21 -

Celular: 313 282 9304

www.tracksolidcolombia.co

